

Product Spec

AOPEN i915GMt-FSA

CPU

Socket 479 Intel Pentium M CPU (Dothan)
Socket 479 Intel Celeron M CPU
FSB 533/400 MHz

CHIPSET

North Bridge: Intel 915GM
South Bridge: Intel ICH6M

MEMORY

Dual Channel Mode
Support : DDRII 533/400
DDRII DIMM x 2 up to 2GB

GRAPHICS

Integrated in Intel 915GM chipset

EXPANSION SLOT

1 x PCI slot

STORAGE

Embedded Serial ATA and IDE controller in ICH6M
-2 x Ultra DMA 100/66/33 devices
-2 x Serial ATA devices

LAN


Realtek GbE LAN

AUDIO

Realtek Azalia Codec ALC880 on-Board
Support Intel High Definition 7.1 Channel Audio

REAR PANEL I/O

1 x Power DC-in jack(support 19V, 90W adapter)
2 x PS/2 ports
1 x S-Video port
1 x D-sub port
1 x COM port
4 x USB ports
1 x RJ45 LAN port
1 x IEEE 1394 port
1 x 7.1 Audio port (Mic_in, Speaker out, Line_in, Rear Surround, Side Surround, Center/Subwoofer)

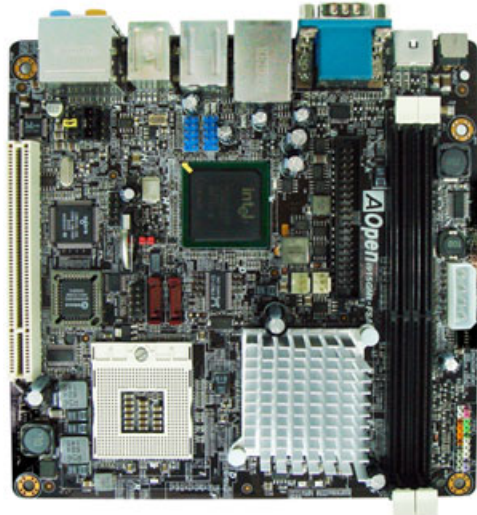

IEEE 1394

Agere IEEE 1394 controller to support 2 ports

SYSTEM BIOS

Award PnP 4Mb Flash ROM BIOS

FORM FACTOR

Flex ATX (Mini ITX), Size: 170mm*170mm

INTERNAL I/O CONNECTORS & HEADERS

1 x 4-pin 12V Output connector
1 x CPU FAN header
1 x System FAN header
1 x Front panel switch/LED header
1 x Front audio header
1 x IDE connector support 2 IDE devices
2 x Serial ATA connectors
2 x USB 2.0 headers support 4 USB ports
1 x COM header
1 x IEEE 1394 header
1 x CD_IN header

ACCESSORY

1 x Easy Installation Guide
1 x Driver CD
1 x 4-pin power cable
1 x 80-wire IDE cable
1 x Serial ATA cable
1 x Serial ATA power cable
1 x YPbPr converter cable from S-Video port
1 x Back Panel I/O shield
1 x CPU Cooling FAN
1 x 90W power adapter
1 x power cord

